



# ProRF-T

## 카메라 내장형 카드 번용 단말기

ProRF-T는 2.4인치 TFT LCD 화면을 갖춘 RFID 카드 전용 출입통제/근태관리 단말기입니다.

컬러 디스플레이와 새로운 펌웨어 구조로 사용자로 하여금 쉽게 관리할 수 있는 메뉴 구성뿐만 아니라 출석 사진과 사진 ID를 사용할 수 있는 사진 촬영 기능을 제공합니다.

1.2GHz의 프로세서가 탑재되어 있으며, 새로운 ZMM220 하드웨어 플랫폼으로 설계된 제품으로서, 고속의 인증이 가능합니다.

\* 운영 소프트웨어: ZKBioSecurity

\* ZKTeco의 Green Label 제품으로서, 3년의 무상 AS를 보증합니다.



# ZKTeco



## Features



내장형 카메라



멀티 인증 모드 (카드/PW)






모던 스타일 디자인 및 직관적인 UI



간편한 관리와 높은 확장성





TFT-LCD 컬러 터치 스크린

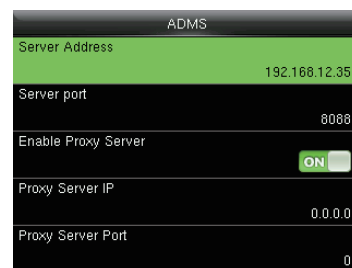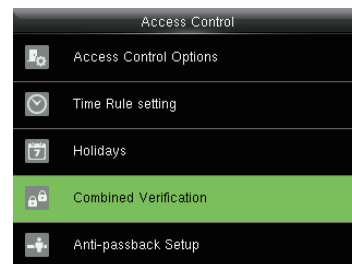

## Specifications (GL Exclusive Feature)

|                          |                                                                                                                                                                                                                 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Card Capacity            | 50,000                                                                                                                                                                                                          |
| Transactions Capacity    | 100,000                                                                                                                                                                                                         |
| User Photos              | 3,000                                                                                                                                                                                                           |
| Event Photos             | 7,000                                                                                                                                                                                                           |
| Communication            | TCP / IP, RS485 (For Slave Reader), USB Host, Wiegand Input / Output, Security Relay Box                                                                                                                        |
| Hardware                 | 1.2GHz Dual Core CPU, Memory 128MB RAM / 256MB Flash, 2.4 Inches TFT-LCD Touch Screen, 125KHz EM Reader / Mifare (Optional), Hi-Fi Voice & Indicator, Tamper Switch Alarm, Touch Keypad, 120° Wide Angle Camera |
| Standard Functions       | Access Levels / Groups / Holidays, DST / Bell Schedule, Duress Mode(Password), Anti-Passback, Record Query, Custom Wallpaper & Screen Saver                                                                     |
| Special Functions        | Multiple Verification Modes, Event Snapshot, User Photo(Optional)                                                                                                                                               |
| Access Control Interface | Lock Relay Output, Alarm Output / Auxiliary Input, Exit Button / Door Sensor, Doorbell Output                                                                                                                   |
| Compatibility            | Wiegand Slave Reader, ZKBioSecurity Software, RS485 Card Slave Reader (Optional)                                                                                                                                |
| Working Temperature      | -10 °C ~ 50 °C                                                                                                                                                                                                  |
| Dimensions               | 195.5 × 87 × 35 mm.                                                                                                                                                                                             |
| Power                    | Operating Voltage 12V DC, Current Draw < 500 mA                                                                                                                                                                 |

## Configuration Dimensions (mm)

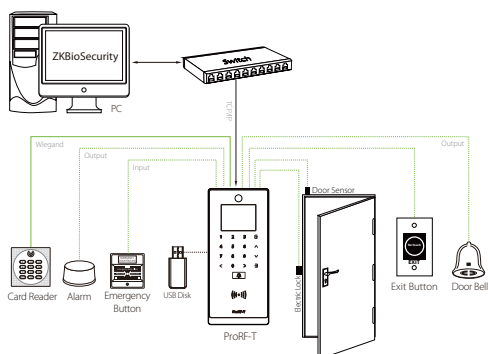

ZKTeco Korea  
www.zkteco.kr  
E-mail: ZKTECOKOREA1@ZKTECO-KOREA.COM



© Copyright 2018. ZKTECO CO.,LTD. ZKTeco Logo is a registered trademark of ZKTeco or a related company. All other product and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.